


# MAXGUARD®



## U-190

# VERSATILITY MEETS TECHNOLOGY

Demilec's high-performance elastomeric coatings cure quickly, minimize project down time, and can be sprayed year-round. These spray-applied coatings protect common materials from weather, corrosion, and chemical exposure.

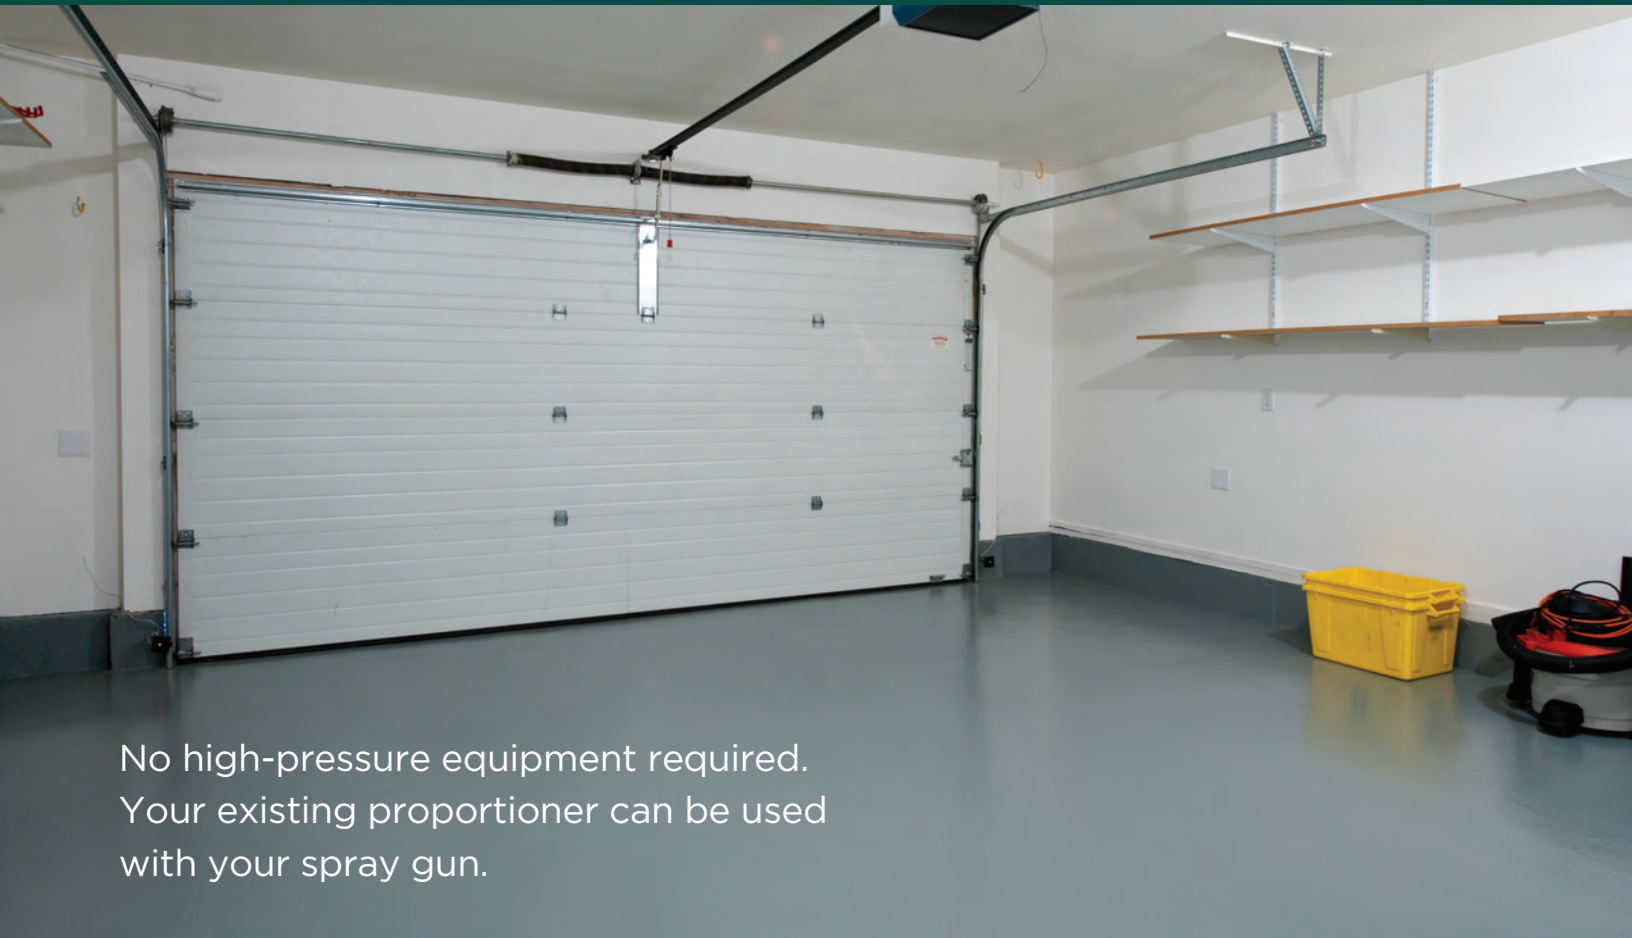

No high-pressure equipment required.  
Your existing proportioner can be used  
with your spray gun.



© Demilec USA. 3315 E. Division St., Arlington, TX 76011  
877.Demilec (877.336.4532) | 817.640.4900  
info@DemilecUSA.com | www.DemilecUSA.com

# MAXGUARD U-190

## LOW-PRESSURE APPLICATION

Our **Maxguard™ U-190** elastomeric coating provides many advantages due to its versatile properties and applications. A huge benefit of Maxguard U-190 is that building professionals who already have the low-pressure equipment used to spray polyurethane foam, can also spray Maxguard U-190. It can be applied on virtually any contour to provide a monolithic containment barrier. This provides a solution for substrates including wood, glass, concrete, metal, fiberglass, PVC, and geotextile.

- 
- ⬡ **Cures rapidly**
  - ⬡ **Installs quickly**
  - ⬡ **100% solid, no VOC's**
  - ⬡ **Excellent adhesion**
  - ⬡ **Impact resistant**
  - ⬡ **Minimizes substrate degradation**
  - ⬡ **Excellent mechanical properties**

